

RXR06 SERIES

High Voltage Contactors

60A CONTINUOUS DUTY

750V SYSTEM VOLTAGE



FEATURES

SPST Normally Open High Voltage Contactors


- Metal-ceramic hermetic seal
- High Temperature Performance
- Low contact resistance over life
- Meets RoHS 2011/65/EU
- IEC60947-5-1 compliant



PERFORMANCE

TABLE 1. SPECIFICATIONS

CHARACTERISTIC	MEASURE	
Contact Arrangement	Form X, SPST NO	
Max Switching Voltage ¹	750 VDC	
Dielectric Withstand Voltage	3,000 VAC, 1 minute contacts to coil 4,000 VDC, 1 minute across open contacts	
Continuous Current (15mm ² conductor)	60A	
Overload Current	30 seconds	240A
	1 hour	90A
Make and Break – 60A @ 750V	3,000 cycles	
Max Short Circuit Current -0.5 second	600 A	
Min Insulation Resistance	1,000 Mohm @ 1,000VDC	
Contact Voltage Drop (Max)	125mV @ 60A	
Operate Time (Max, incl bounce)	30ms	
Release Time (Max)	10ms	
Shock - Functional, 1/2 Sine, 11ms	20G	
Shock – Destructive, 1/2 Sine, 11ms	50G	
Operating Temperature	-40°C to 85°C	
Ingress Protection	Exceeds IP69, (Hermetically sealed)	
Mechanical life	200,000 cycles	
AUXILIARY CONTACTS	MEASURE	
Contact Arrangement	Not available	
COIL (20° C)	MEASURE	
Nominal Voltage	12 VDC	24 VDC
Pick-up Voltage (Max)	9 VDC	18 VDC
Drop-out Voltage (Min)	1 VDC	2 VDC
Holding Current (Max)	0.44A	0.22A
Coil Power at Nominal Voltage	5.2W	5.2W

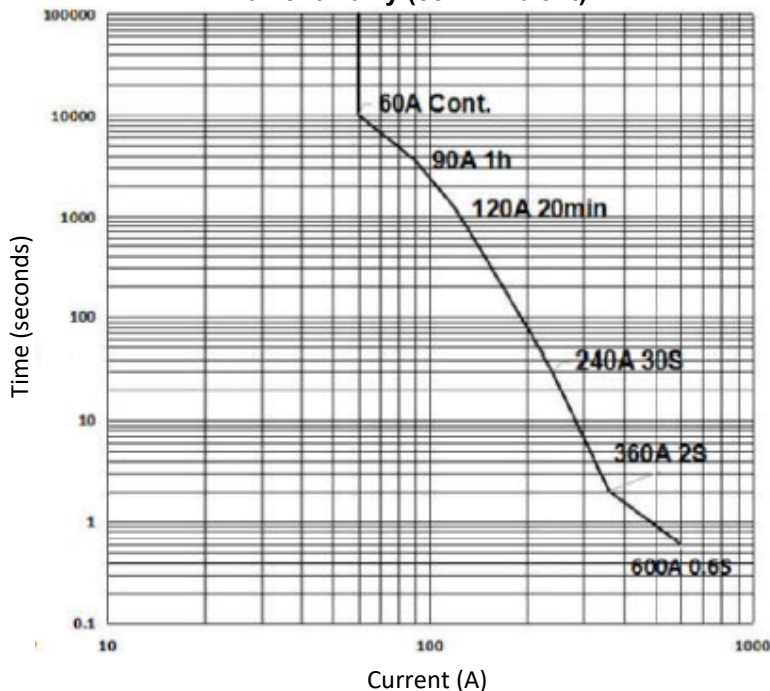Current Carry (85C Ambient)

**TABLE 2. RESISTIVE LOAD SWITCHING
(MAKE / BREAK DATA)**

BI-DIRECTIONAL VERSION		CYCLES (1 cycle = 1 make + 1 break)
VOLTAGE	CURRENT	
750V	60A	3,000
750V	10A	50,000

¹ Contactor can be used in systems with higher voltages, but should be limited to no current, or very low current breaking. Contact Rincon Power for more details

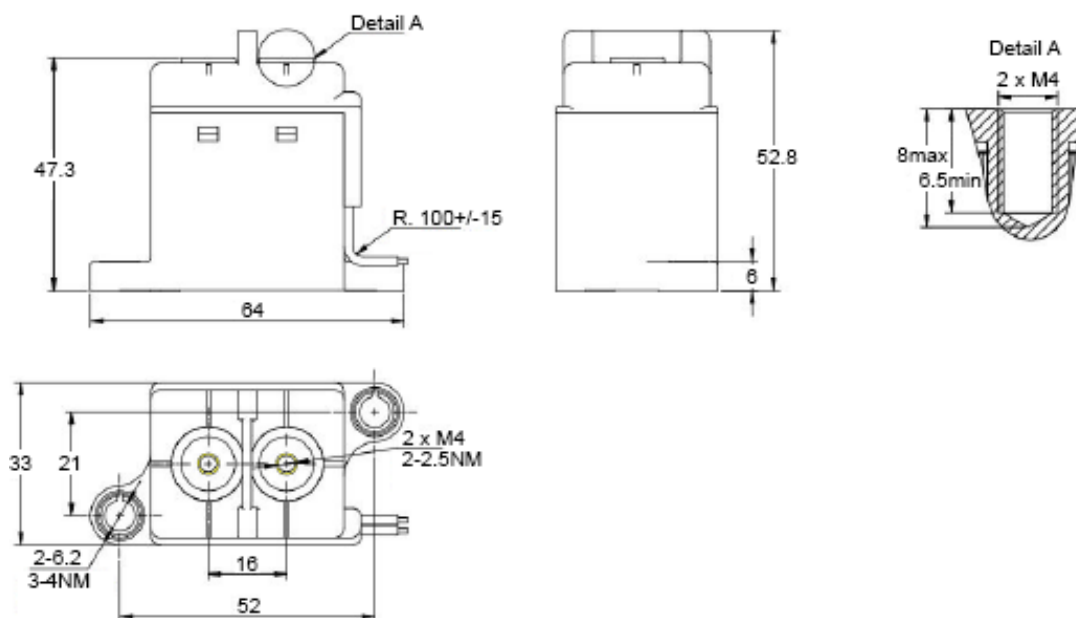
OPTIONS

TABLE 3. PRODUCT NOMENCLATURE

	CONTACT POLARITY	MOUNTING	COIL	AUXILIARY CONTACTS
RXR06	B Bi-directional	1 Bottom Mount	A 12V	X None
		4 PCB Assembly with studs	B 24V	


PRODUCT DIMENSIONS [mm]

Bottom Mount


TABLE 4. DIMENSIONAL AND INSTALLATION

CHARACTERISTIC	MEASURE
Weight	170g (0.38 lb)
Mounting Position	Any / Not Position Sensitive
Package Quantity	30
Install Torque	3-4Nm (27-35 in-lb)
M4 Main Terminals	

PCB Assembly with Studs

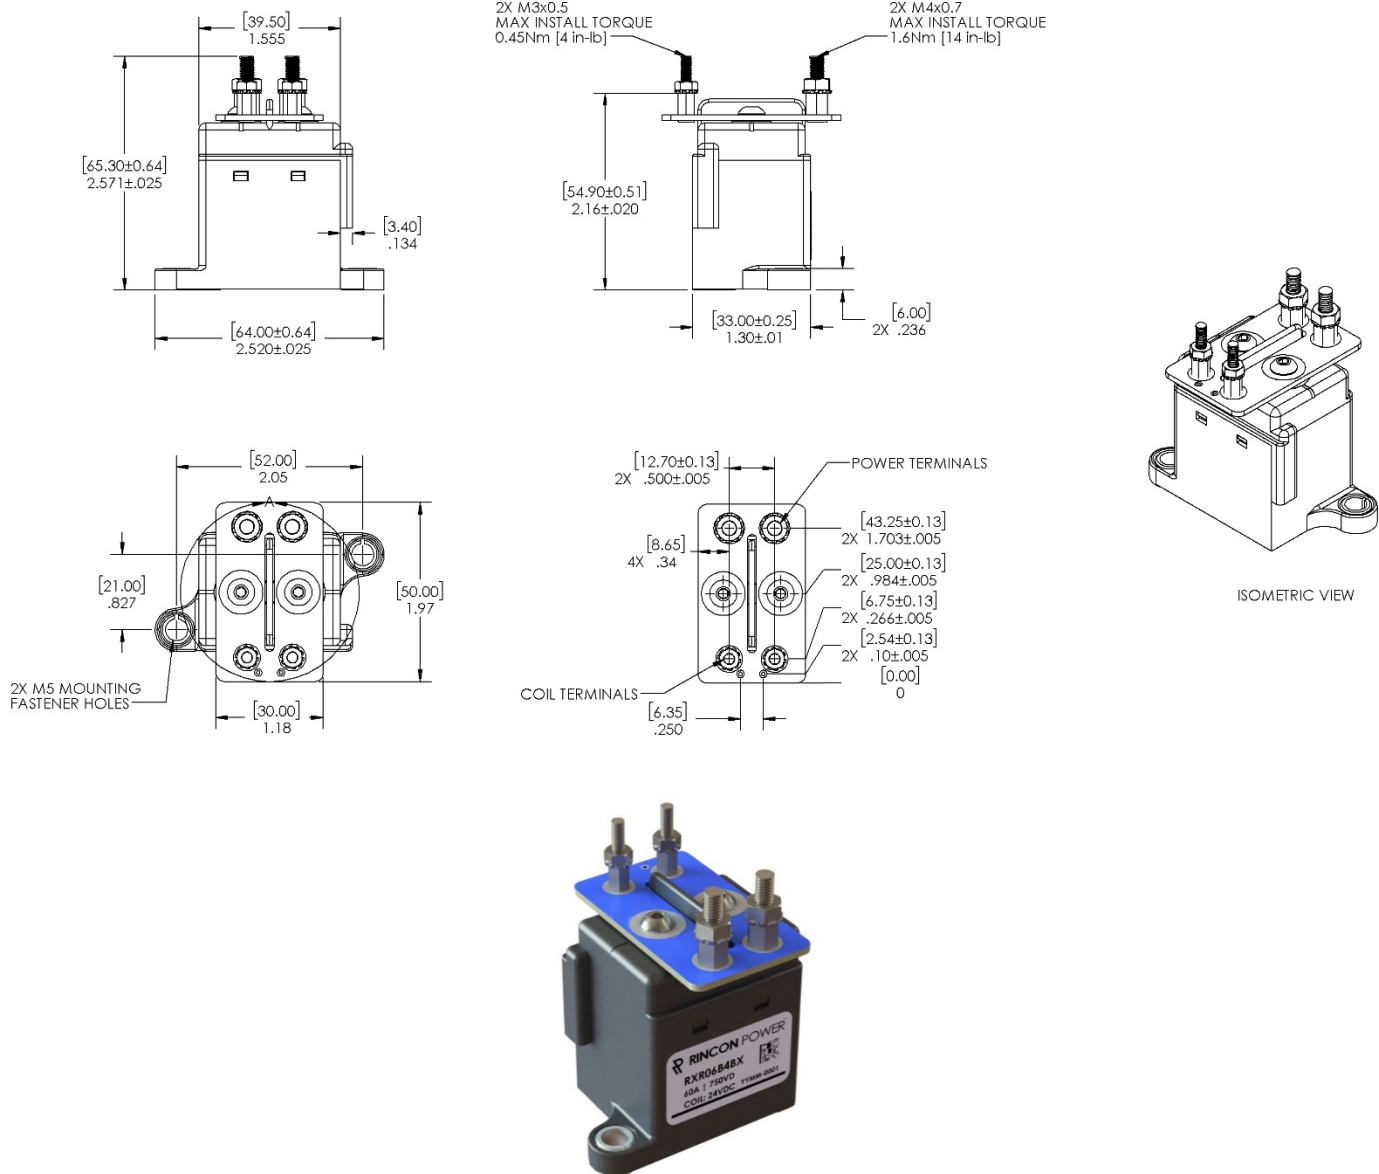

NOTES

- Attached cables and busbars directly to the main terminal pad using the recommended install torque. Do not use washers or other materials between the contactor and the conductor. This will ensure the lowest possible contact resistance
- Avoid excessive coil voltages. Exceeding the ratings on the datasheet may result in high coil temperature and coil failure
- Contactor may be used above Max Switching Voltage if the application does not require significant load breaking. Please contact Rincon Power to discuss in more detail